
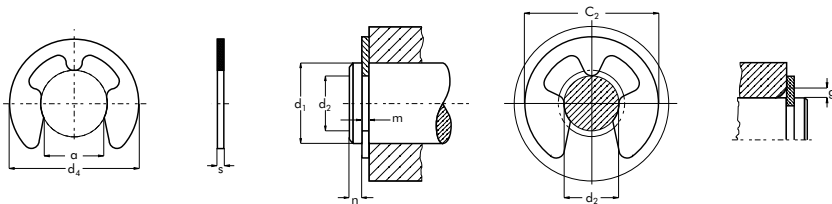


d ₂	DIN6799 D1500 RA	d ₁									Groove			D A T A						
		from	to	s	Tolerance	d ₄	α	Tolerance	C ₂	Weight (kg/1000)	d ₂	Tolerance	m min.	n	FN (kN)	d ₁	FR (kN)	g	FRg (kN)	n _{det.} x1000 (rpm)
		1.2	RA1.2	1.4	2.0	0.30	±0.02	2.90	1.01	±0.04	3.0	0.009	1.2	-0.060	0.34	0.6	0.04	1.5	0.12	0.4
1.5	RA1.5	2.0	2.5	0.40	3.90	1.28		4.0	0.021		1.5	0.44	0.8		0.07	2.0	0.22	0.6	0.11	42
1.9	RA1.9	2.5	3.0	0.50	4.40	1.61		4.5	0.040		1.9	0.54	1.0		0.10	2.5	0.35	0.7	0.17	40
2.3	RA2.3	3.0	4.0	0.60	5.90	1.94		6.0	0.069		2.3	0.64	1.0		0.15	3.0	0.50	0.9	0.24	38
3.2	RA3.2	4.0	5.0	0.60	6.90	2.70		7.0	0.088		3.2	0.64	1.0		0.22	4.0	0.65	0.9	0.32	35
4.0	RA4.0	5.0	7.0	0.70	±0.03	8.85	3.34	±0.048	9.0	0.158	4.0	-0.075	0.74	1.2	0.25	5.0	0.95	1.0	0.47	32
5.0	RA5.0	6.0	8.0	0.70		10.85	4.11		11.0	0.236	5.0		0.74	1.2	0.90	7.0	1.15	1.0	0.60	28
6.0	RA6.0	7.0	9.0	0.70		11.80	5.26		12.0	0.255	6.0		0.74	1.2	1.10	8.0	1.35	1.1	0.70	25
7.0	RA7.0	8.0	11.0	0.90		13.80	5.84		14.0	0.474	7.0		0.94	1.5	1.25	9.0	1.80	1.3	1.00	22
8.0	RA8.0	9.0	12.0	1.00		15.75	6.52		16.0	0.660	8.0		1.05	1.8	1.42	10.0	2.50	1.5	1.25	20
9.0	RA9.0	10.0	14.0	1.10	±0.058	18.20	7.63	±0.070	18.5	1.000	9.0	-0.090	1.15	2.0	1.60	11.0	3.00	1.6	1.50	17
10.0	RA10.0	11.0	15.0	1.20		19.70	8.32		20.0	1.120	10.0		1.25	2.0	1.70	12.0	3.50	1.8	1.75	15
12.0	RA12.0	13.0	18.0	1.30		22.70	10.45		23.0	1.770	12.0		1.35	2.5	3.10	15.0	4.70	1.9	2.30	13
15.0	RA15.0	16.0	24.0	1.50		28.70	12.61		29.0	3.370	15.0		1.55	3.0	7.00	20.0	7.80	2.2	3.30	11
19.0	RA19.0	20.0	31.0	1.75		36.50	15.92		37.0	6.420	19.0		1.80	3.5	10.00	25.0	11.00	2.5	3.60	8
24.0	RA24.0	25.0	38.0	2.00	43.50	21.88	44.0	8.550	24.0	2.05	4.0	13.00	30.0	15.00	3.0	4.00	6			



DIN 6799/D1500/RA

Add:L-2,FL21,INTL CONVENTION & EXHIBITION CENTER BUILDING,NB P.R.CHINA Tel:+86-574-87714998, +86-574-87714118

Fax:+86-574-87714808 E-mail:sales@nb-speedtrading.com Http://www.nb-speedtrading.com MSN:shellie_fu@hotmail.com