


d ₁	DIN7993 B/RB	○					Groove			d ₁	DIN7993 B/RB	○					Groove		
		d ₇	d ₃	Tolerance	e	Weight (kg/1000)	d ₂	Tolerance	r			d ₇	d ₃	Tolerance	e	Weight (kg/1000)	d ₂	Tolerance	r
7	RB7	0.8	7.9	+0.3	4	0.071	7.8	±0.05	0.5	45	RB45	2.5	48.8	+0.8	16	4.89	47.5	±0.10	1.4
8	RB8	0.8	8.9		4	0.083	8.8		0.5	48	RB48	2.5	51.0		16	5.24	50.5		1.4
10	RB10	0.8	10.9		4	0.108	10.8		0.5	50	RB50	2.5	53.0		16	5.51	52.5		1.4
12	RB12	1.0	13.2	+0.4	6	0.196	13.0		0.6	55	RB55	3.2	58.9		20	9.77	58.2	±0.15	1.8
14	RB14	1.0	15.2		6	0.234	15.0		0.6	60	RB60	3.2	63.9		20	10.76	63.2		1.8
16	RB16	1.6	17.8		8	0.706	17.6		0.9	65	RB65	3.2	68.9		20	11.75	68.2		1.8
18	RB18	1.6	19.8	+0.5	8	0.804	19.6	±0.10	0.9	70	RB70	3.2	74.0	+1.0	25	12.44	73.2	±0.15	1.8
20	RB20	2.0	22.3		10	1.320	22.0		1.1	75	RB75	3.2	79.0		25	13.43	78.2		1.8
22	RB22	2.0	24.3		10	1.470	24.0		1.1	80	RB80	3.2	84.0		25	14.42	83.2		1.8
24	RB24	2.0	26.3	+0.6	10	1.630	26.0		1.1	85	RB85	3.2	89.0	+1.2	25	15.41	88.2		1.8
25	RB25	2.0	27.3		10	1.700	27.0		1.1	90	RB90	3.2	94.0		25	16.40	93.2		1.8
26	RB26	2.0	28.3		10	1.790	28.0		1.1	95	RB95	3.2	99.0		25	17.39	98.2		1.8
28	RB28	2.0	30.3	+0.8	10	1.940	30.0		1.1	100	RB100	3.2	104.2	+1.2	32	17.98	103.2		1.8
30	RB30	2.0	32.3		10	2.100	32.0		1.1	105	RB105	3.2	109.2		32	18.98	108.2		1.8
32	RB32	2.5	34.9		12	3.470	34.5		1.4	110	RB110	3.2	114.2		32	19.97	113.2		1.8
35	RB35	2.5	37.9	+0.8	12	3.850	37.5	±0.10	1.4	115	RB115	3.2	119.2	+1.2	32	20.96	118.2	±0.15	1.8
38	RB38	2.5	40.9		12	4.200	40.5		1.4	120	RB120	3.2	124.2		32	21.95	123.2		1.8
40	RB40	2.5	42.9		12	4.430	42.5		1.4	125	RB125	3.2	129.2		32	22.94	128.2		1.8
42	RB42	2.5	45.0		16	4.540	44.5		1.4										

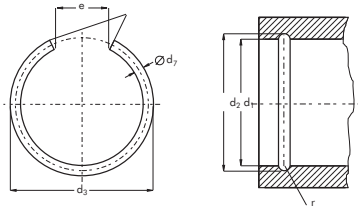

Add:L-2,FL21,INTL CONVENTION & EXHIBITION CENTER BUILDING,NB P.R.CHINA Tel:+86-574-87714998, +86-574-87714118

Fax:+86-574-87714808 E-mail:sales@nb-speedtrading.com Http://www.nb-speedtrading.com MSN:shellee_fu@hotmail.com