


d ₁	KS								D A T A	
		Tolerance	d ₃	d ₄	s		n min.	h	Weight (kg/1000)	H (N)
1.5	KS1.5	+0.000 -0.025	1.30	6.00	0.25	3	2.5	1.2	0.10	200
2.0	KS2.0		1.80	7.00	0.30	3	2.5	1.3	0.13	400
2.5	KS2.5		2.30	8.25	0.30	3	2.5	1.5	0.15	700
3.0	KS3.0		2.80	10.00	0.40	3	3.0	2.0	0.20	1200
3.5	KS3.5	+0.000 -0.030	3.25	11.50	0.40	3	3.0	2.0	0.25	1200
4.0	KS4.0		3.75	13.00	0.50	4	3.5	2.4	0.50	1300
5.0	KS5.0		4.75	15.00	0.50	4	3.5	2.7	0.75	1500
6.0	KS6.0		5.75	16.50	0.60	6	4.0	2.6	1.15	1800
7.0	KS7.0	+0.000 -0.036	6.75	18.00	0.60	6	4.0	2.9	1.25	2000
8.0	KS8.0		7.75	19.50	0.70	6	4.0	2.8	1.40	3000
9.0	KS9.0		8.75	21.00	0.70	6	4.0	3.0	1.50	3500
10.0	KS10.0		9.75	22.00	0.80	6	4.0	3.0	1.65	4000

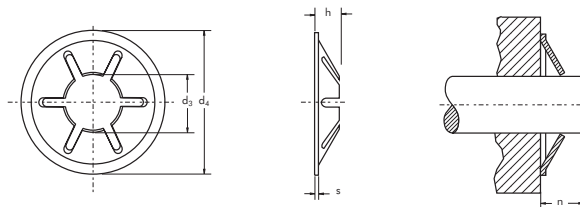

KS

Add:L-2,FL21,INTL CONVENTION & EXHIBITION CENTER BUILDING,NB P.R.CHINA Tel:+86-574-87714998, +86-574-87714118
 Fax:+86-574-87714808 E-mail:sales@nb-speedtrading.com Http://www.nb-speedtrading.com MSN:shellee_fu@hotmail.com